



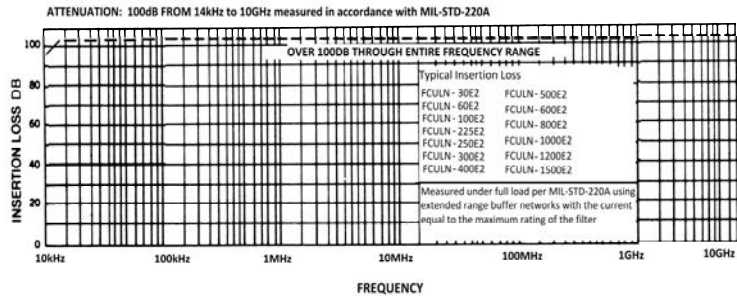

HEMP

IAW UL Safety Specification 1283

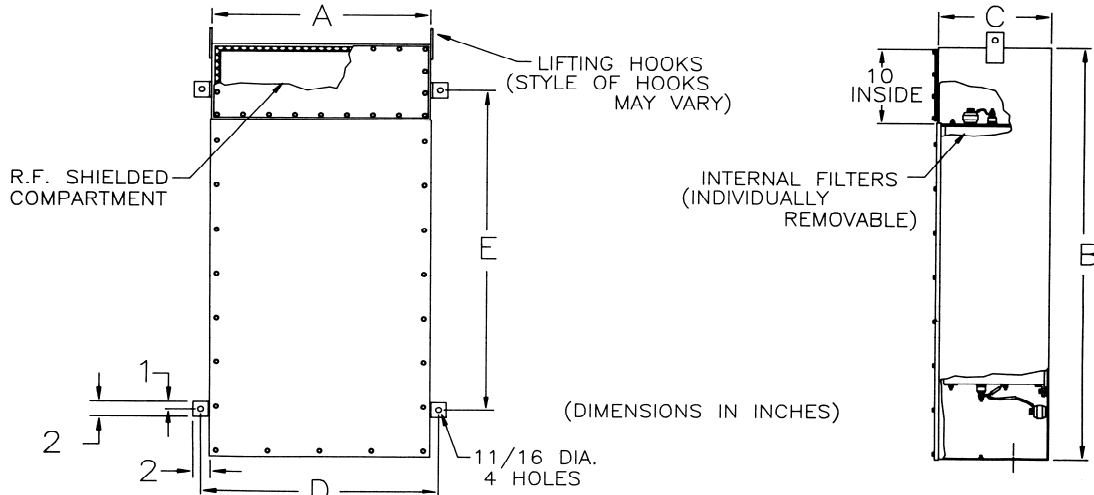

NOTES:

1. Filters are listed IAW UL specification #1283
2. Temperature Range: Operating -55°C to +85°C
3. Enclosures are made from cold rolled steel with continuously welded seams
4. Filter ground path connecting surfaces shall be tin plated or stainless steel
5. Conduit hubs or clearance holes may be provided if specified when ordering
6. Each phase filter is individually removable
7. Internal filters are filed with a non-flammable impregnant and hermetically sealed
8. Legs for floor mounting may be provided if specified when ordering
9. Filters for 300AMP and up have 6" x 2" mounting U-Channel

| Part Number | Current Rating (AMP) | Voltage Rating | | Frequency Rating (Hz) | Dimensions (INCHES) | | | | | Weight Approx. (LBS) |
|------------------|----------------------|----------------|-----|-----------------------|---------------------|--------|--------|--------|--------|----------------------|
| | | LG / LL VAC | VDC | | A±.060 | B±.060 | C±.060 | D±.060 | E±.060 | |
| FCULN-4 X 30E2 | 4 x 30 | 277 / 480 | 600 | 60 | 28 | 38 | 6 | 32 | 26 | 220 |
| FCULN-4 X 60E2 | 4 x 60 | 277 / 480 | 600 | 60 | 28 | 41 | 8 | 32 | 29 | 315 |
| FCULN-4 X 100E2 | 4 x 100 | 277 / 480 | 600 | 60 | 38 | 48 | 10 | 40 | 36 | 520 |
| FCULN-4 X 225E2 | 4 x 225 | 277 / 480 | 600 | 60 | 28 | 54 | 16 | 32 | 42 | 750 |
| FCULN-4 X 250E2 | 4 x 250 | 277 / 480 | 600 | 60 | 28 | 54 | 16 | 32 | 42 | 750 |
| FCULN-4 X 300E2 | 4 x 300 | 277 / 480 | 600 | 60 | 60 | 72 | 16 | 66 | 44 | 850 |
| FCULN-4 X 400E2 | 4 x 400 | 277 / 480 | 600 | 60 | 60 | 72 | 16 | 66 | 44 | 975 |
| FCULN-4 X 500E2 | 4 x 500 | 277 / 480 | 600 | 60 | 60 | 72 | 16 | 66 | 44 | 1075 |
| FCULN-4 X 600E2 | 4 x 600 | 277 / 480 | 600 | 60 | 45 | 72 | 34 | 51 | 44 | 1600 |
| FCULN-4 X 800E2 | 4 x 800 | 277 / 480 | 600 | 60 | 60 | 72 | 34 | 66 | 44 | 2400 |
| FCULN-4 X 1000E2 | 4 x 1000 | 277 / 480 | 600 | 60 | 60 | 72 | 34 | 66 | 44 | 2500 |
| FCULN-4 X 1200E2 | 4 x 1200 | 277 / 480 | 600 | 60 | 72 | 72 | 34 | 78 | 44 | 2750 |
| FCULN-4 X 1500E2 | 4 x 1500 | 277 / 480 | 600 | 60 | 72 | 72 | 34 | 78 | 44 | 2900 |

*All Filter Cabinets are also available in 2 line and 3 line configuration

